


FT15 缓冲固装铰链

Soft-closing Indivisible Hinge




- 开启角度: 100度
- 铰杯厚度: 12.2毫米
- 铰杯直径: 35毫米
- 面板(K)尺寸: 3毫米-7毫米
- 材质: 铁镀镍
- 门可选用板厚: 14毫米-20毫米
- Opening angle: 100°
- Depth of hinge cup: 12.2mm
- Diameter of hinge cup: 35mm
- Drilling distance on the door(K): 3-7mm
- Material: cold rolled steel, nickel plated
- Range of door thickness: 14-20mm

铰杯种类 Hinge cup types

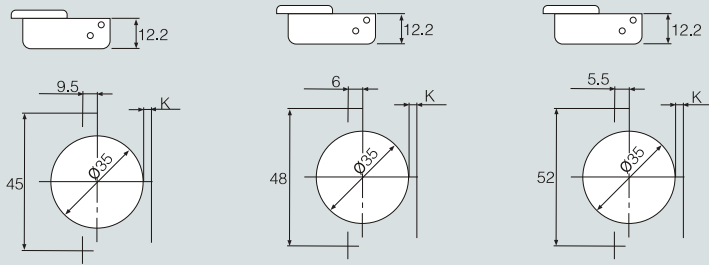

可配底座 Plate

序号 No	名称 Item no.	H值 H Value	孔型/安装尺寸L Hole type/Mounting dimension	类型 type
1	FT15	H=0	四孔four holes/37mm	普通 Normal
2	F10S/F12S/F14S	H=0/2/4	两孔two holes/37mm	普通 Normal
3	F10S-U/F12S-U/F14S-U	H=0/2/4	两孔two holes/37mm	普通 Normal

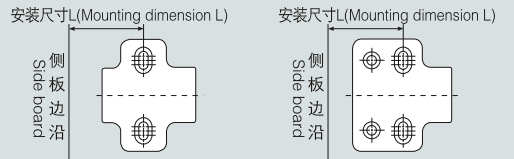


FT15系列内置阻尼自动铰链功能图 FT15 Installation dimensions

D: 盖位计算值表 Overlay
A: 间隙位计算值表 Gap



FT15A 全盖 Full overlay

$$H = 15 + K - D$$




D \ H \ K	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4	14	15	16	17	18



FT15B 半盖 Half overlay

$$H = 6 + K - D$$




D \ H \ K	3	4	5	6	7
0	9	10	11	12	13
2	7	8	9	10	11
4	5	6	7	8	9



FT15C 内嵌 Insert

$$H = -4 + K + A$$



A \ H \ K	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1