



→ 隐藏式、全拉出、静音式

→ 载重：35kg

→ 材料：镀锌板

→ 材料厚度(上、中、下)轨：1.0x1.5x1.8mm

→ 无需工具，抽屉可快速安装与拆卸

→ 静音系统，滑轨运动顺畅

→ 三维调节，高度调节0~3mm，左右调节±2mm，前后调节0~4mm

→ 缓冲功能 平缓关闭

→ Concealed, full extension, quiet movement

→ Dynamic load capacity: 35kg

→ Material: galvanized steel

→ Material thickness: 1.0x1.5x1.8mm

→ Tool-free quick installation



→ Quiet system guarantees the slides run smoothly without noise

→ 6-way adjustment, 0~3mm highly, ±2mm left and right, 0~4mm before and after

→ Soft-closing function make the drawer close safely without effect of weight

可选二方位调节分离器
2 directions locking device

六方位调节分离器
6 directions locking device

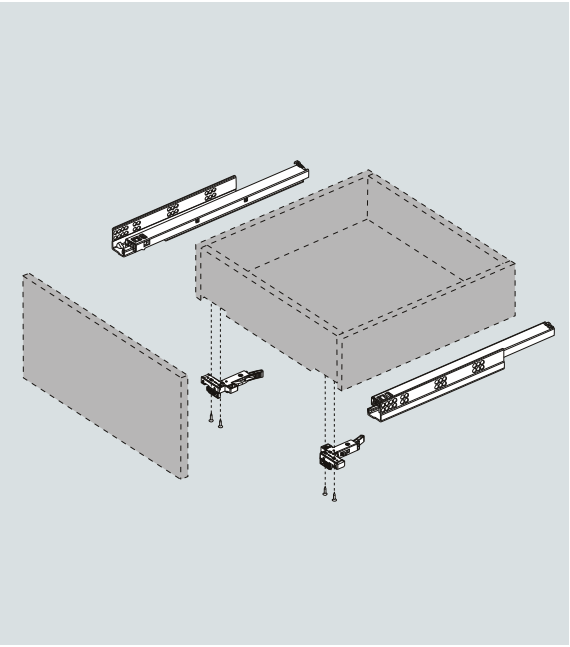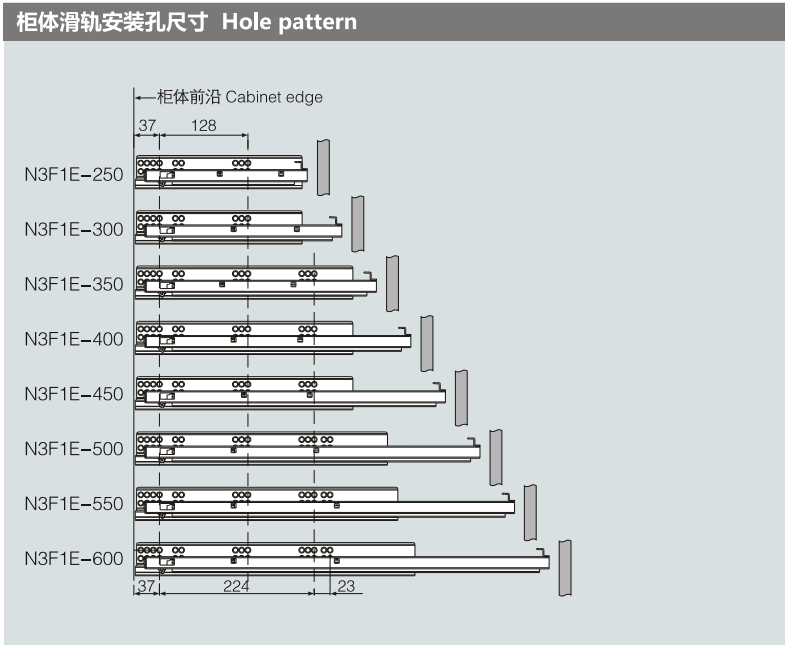

产品型号 Item No.	标称长度NL (mm) Nominal length	拉出长度 (mm) Travel length	最小柜深LT (mm) (外抽 / 内抽) Min cabinet depth (Standard / Inner)	包装 (套/箱) Packing (Set/Box)
N3F1E-250	250	229	260 / 260+X	10
N3F1E-300	300	279	310 / 310+X	10
N3F1E-350	350	329	360 / 360+X	10
N3F1E-400	400	379	410 / 410+X	10
N3F1E-450	450	429	460 / 460+X	10
N3F1E-500	500	479	510 / 510+X	10
N3F1E-550	550	529	560 / 560+X	10
N3F1E-600	600	579	610 / 610+X	10

柜体所需空间 Space required

SKW: 抽屉净宽 Drawer width
LW: 柜体净宽 Inside net width
Max.: 最大尺寸

外置抽屉 Standard drawer

NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth

内置抽屉 Inner drawer

NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth
X: 面板厚度 Thickness of the front panel

抽屉后板开槽打孔尺寸 Hole size on rear panel of the drawer

NL: 标称长度 Nominal length
Min.: 最小尺寸

分离器安装 Installation of the locking device

可选配六方位调节分离器或二方位调节分离器
6 directions locking device or 2 directions locking device

装卸调试步骤说明 Installation instruction

滑轨安装 Installation of the slides

抽屉安装与调节
Installation of the drawer and adjustment

抽屉可通过调节块来调节高度2mm
The drawer can be adjusted 2mm vertically through the plastic adjustable patrs

抽屉拆卸 Removal of the drawer

双手轻压分离器，见箭头方向，即可拆卸
Press the locking device with your hands softly in the direction of the arrow , then remove the drawer