N3F1Z SOFT-CLOSING CONCEALED FULL EXTENSION SLIDE (16MM BOARD THICKNESS WITH LOCKING DEVICE)
三节隐藏式缓冲滑轨(16mm板厚带分离器)

可选二方位调节分离器
2 directions locking device

美式六方位调节分离器
6 directions locking device

- 隐藏式、全拉出、静音式、美式
- 载重：35kg
- 材料：镀锌板
- 材料厚度(上、中、下)轨：1.0x1.5x1.8mm
- 无需工具，抽屉可快速安装与拆卸
- 三维调节，高度调节0~3mm，左右调节±2mm，前后调节0~4mm

- Soft close concealed full extension slide
- Dynamic load capacity: 35kg
- Material: galvanized steel
- Material thickness: 1.0x1.5x1.8mm
- Tool-free quick installation
- 6-way adjustment, 0~3mm highly, ±2mm left and right , 0~4mm before and after

塑料后连接件
Plastic Rear Mounting Braket



钢后连接件
Steel Rear Mounting Braket

柜体滑轨安装孔尺寸 Hole pattern

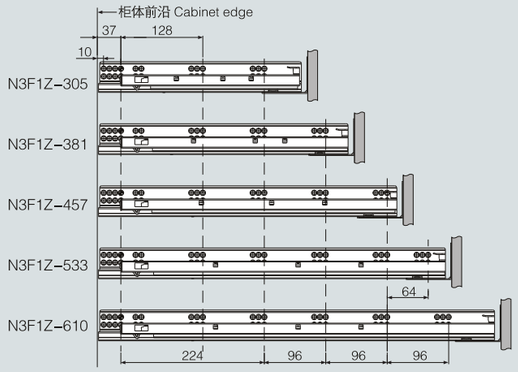

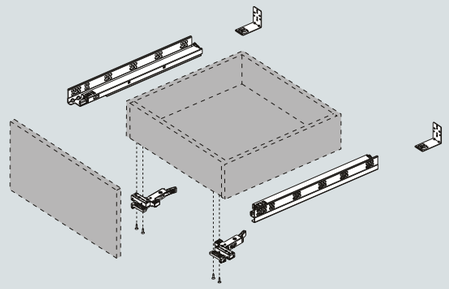

产品型号 Item No.	标称长度NL (mm) Nominal length	拉出长度 (mm) Travel length	最小柜深LT (mm) Min cabinet depth	最大柜深LT (mm) Max cabinet depth	包装 (套/箱) Packing (Set/Box)
N3F1Z-305	305	292	324	360	10
N3F1Z-381	381	368	400	436	10
N3F1Z-457	457	444	476	512	10
N3F1Z-533	533	520	552	588	10
N3F1Z-610	610	597	629	665	10

SH-ABC

柜体所需空间 Space required

SKW：抽屉净宽 Drawer width
LW：柜体净宽 Inside net width
Max.：最大尺寸
Min.：最小尺寸



钢后连接件
Steel rear mounting braket



塑料后连接件
Plastic rear mounting braket



外置抽屉 Standard drawer

NL：标称长度 Nominal length
SKL：抽屉长度 Length of drawer
LT：最小柜深 Min cabinet depth



内置抽屉 Inner drawer

NL：标称长度 Nominal length
SKL：抽屉长度 Length of drawer
LT：最小柜深 Min cabinet depth
X：面板厚度 Thickness of the front panel



抽屉后板开槽打孔尺寸 Hole size on rear panel of the drawer

NL：标称长度 Nominal length
Min.：最小尺寸

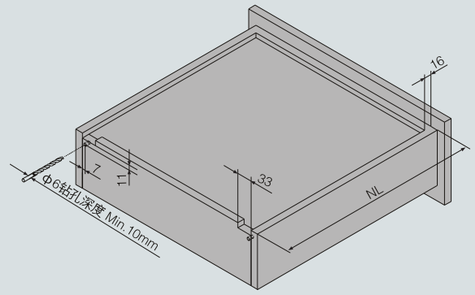

分离器安装 Installation of the locking device



美式六方位调节分离器
6 directions locking device



二方位调节分离器
2 directions locking device

可选配美式六方位调节分离器或二方位调节分离器
6 directions locking device or 2 directions locking device

装卸调试步骤说明 Installation instruction

滑轨安装 Installation of the slides



1. 尾板根据柜体深来调节距离;
Adjust the rear mounting bracket according to the cabinet length;
2. 先调节好尾板后再用M4x12mm螺丝锁紧
Adjust the rear mounting bracket and then fasten it with M4x12mm screws.

抽屉安装与调节 Installation of the drawer and adjustment



将滑轨全拉出，把抽屉放置于滑轨上，水平推入柜体，抽屉即可安装完毕。
Fully open the slides and put the drawer on it, then push into cabinet horizontally, the drawer can be installed.



抽屉可通过调节块来调节高度2mm
The drawer can be adjusted 2mm vertically through the plastic adjustable parts

抽屉拆卸 Removal of the drawer



抽屉拆卸时，双手轻压分离器，见箭头方向，即可拆卸。
Hold the plastic gently according to the direction of the arrow when removing the drawer , then the drawer can be demounted easily.