# N3F1Y SOFT-CLOSING CONCEALED FULL EXTENSION SLIDE (19MM BOARD THICKNESS WITH LOCKING DEVICE)
# 三节隐藏式缓冲滑轨(19mm板厚带分离器)

可选二方位调节分离器
2 directions locking device

美式六方位调节分离器
6 directions locking device

- 隐藏式、全拉出、静音式、美式
- 载重：35kg
- 材料：镀锌板
- 材料厚度(上、中、下)轨：1.0x1.5x1.8mm
- 无需工具，抽屉可快速安装与拆卸
- 三维调节，高度调节0~3mm，左右调节±2mm，前后调节0~4mm
- Soft close concealed full extension slide
- Dynamic load capacity: 35kg
- Material: galvanized steel
- Material thickness: 1.0x1.5x1.8mm
- Tool-free quick installation
- 6-way adjustment, 0~3mm highly, ±2mm left and right , 0~4mm before and after

塑料后连接件
Plastic Rear Mounting Braket

钢后连接件
Steel Rear Mounting Braket

## 柜体滑轨安装孔尺寸 Hole pattern

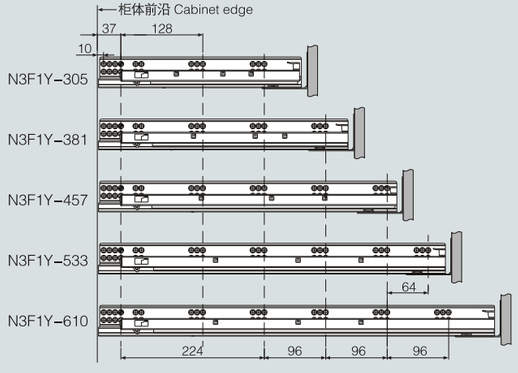


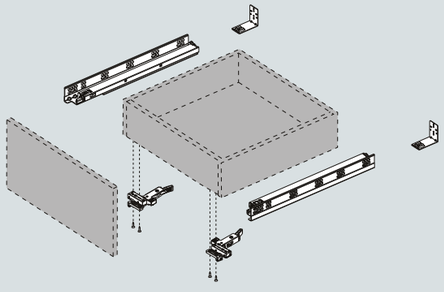

| 产品型号 Item No. | 标称长度NL (mm) Nominal length | 拉出长度 (mm) Travel length | 最小柜深LT (mm) Min cabinet depth | 最大柜深LT (mm) Max cabinet depth | 包装 (套/箱) Packing (Set/Box) |
|---|---|---|---|---|---|
| N3F1Y-305 | 305 | 292 | 324 | 360 | 10 |
| N3F1Y-381 | 381 | 368 | 400 | 436 | 10 |
| N3F1Y-457 | 457 | 444 | 476 | 512 | 10 |
| N3F1Y-533 | 533 | 520 | 552 | 588 | 10 |
| N3F1Y-610 | 610 | 597 | 629 | 665 | 10 |




SH-ABC

## 柜体所需空间 Space required

SKW：抽屉净宽 Drawer width
LW：柜体净宽 Inside net width
Max.：最大尺寸
Min.：最小尺寸




钢后连接件
Steel rear mounting braket




塑料后连接件
Plastic rear mounting braket




## 外置抽屉 Standard drawer

NL：标称长度 Nominal length
SKL：抽屉长度 Length of drawer
LT：最小柜深 Min cabinet depth




## 内置抽屉 Inner drawer

NL：标称长度 Nominal length
SKL：抽屉长度 Length of drawer
LT：最小柜深 Min cabinet depth
X：面板厚度 Thickness of the front panel




## 抽屉后板开槽打孔尺寸 Hole size on rear panel of the drawer

NL：标称长度 Nominal length
Min.：最小尺寸

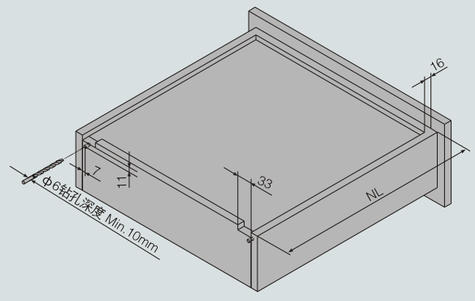


## 分离器安装 Installation of the locking device




美式六方位调节分离器
6 directions locking device




二方位调节分离器
2 directions locking device

**可选配美式六方位调节分离器或二方位调节分离器**
**6 directions locking device or 2 directions locking device**

## 装卸调试步骤说明 Installation instruction

### 滑轨安装 Installation of the slides



1. 尾板根据柜体深来调节距离;
Adjust the rear mounting bracket according to the cabinet length;
2. 先调节好尾板后再用M4x12mm螺丝锁紧
Adjust the rear mounting bracket and then fasten it with M4x12mm screws.

### 抽屉安装与调节 Installation of the drawer and adjustment



将滑轨全拉出，把抽屉放置于滑轨上，水平推入柜体，抽屉即可安装完毕。
Fully open the slides and put the drawer on it, then push into cabinet horizontally, the drawer can be installed.

抽屉可通过调节块来调节高度2mm
The drawer can be adjusted 2mm vertically through the plastic adjustable parts



### 抽屉拆卸 Removal of the drawer



抽屉拆卸时，双手轻压分离器，见箭头方向，即可拆卸。
Hold the plastic gently according to the direction of the arrow when removing the drawer , then the drawer can be demounted easily.