


N2F2E

SOFT-CLOSING CONCEALED PARTIAL EXTENSION SLIDE (19MM BOARD THICKNESS WITH ADJUSTABLE SCREW)
二节隐藏式缓冲滑轨 (19mm 带板厚调节螺柱)



- 隐藏式、静音式

→ 载重：25kg

→ 材料：镀锌板

→ 材料厚度(上、下)轨：1.5x1.5mm

→ 无需工具，抽屉可快速安装与拆卸

→ 静音系统，滑轨运动顺畅

→ 抽屉高度可调节0-4mm

→ 缓冲功能 平缓关闭
- Concealed, quiet movement

→ Dynamic load capacity: 25kg

→ Material: galvanized steel

→ Material thickness: 1.5x1.5mm



→ Tool-free quick installation

→ Quiet system guarantee the slide run smoothly without noise

→ Drawer height is adjustable for 0-4mm

→ Soft-closing function make the drawer close safely without effect of weight


柜体滑轨安装孔尺寸 Hole pattern

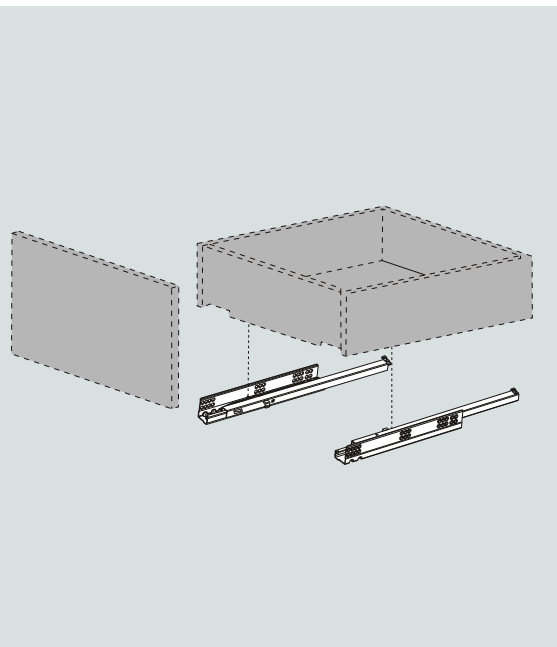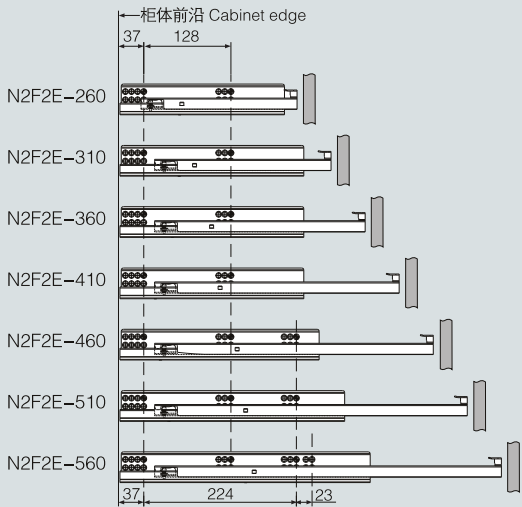

产品型号 Item No.	标称长度NL (mm) Nominal length	拉出长度 (mm) Travel length	最小柜深LT (mm) (外抽 / 内抽) Min cabinet depth (Standard / Inner)	包装 (套/箱) Packing (Set/Box)
N2F2E-260	260	178	270 / 270+X	10
N2F2E-310	310	215	320 / 320+X	10
N2F2E-360	360	265	370 / 370+X	10
N2F2E-410	410	290	420 / 420+X	10
N2F2E-460	460	340	470 / 470+X	10
N2F2E-510	510	365	520 / 520+X	10
N2F2E-560	560	390	570 / 570+X	10


柜体所需空间 Space required

SKW: 抽屉净宽 Drawer width
LW: 柜体净宽 Inside net width
Max.: 最大尺寸
Min.: 最小尺寸

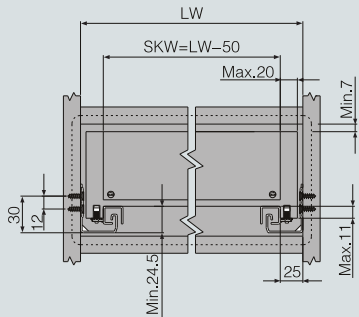


外置抽屉 Standard drawer

NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth

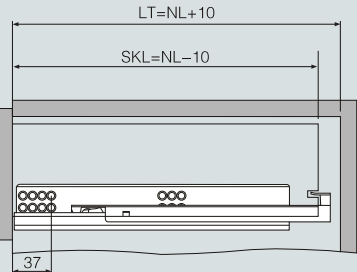

内置抽屉 Inner drawer


NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth
X: 面板厚度 Thickness of the front panel

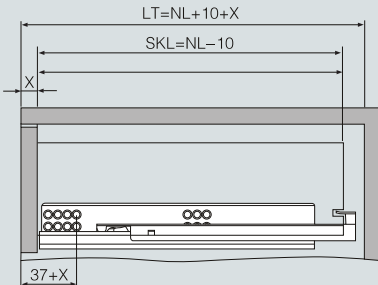

抽屉后板开槽打孔尺寸 Hole size on rear panel of the drawer


NL: 标称长度 Nominal length
Min.: 最小尺寸

NL (mm)	A (mm)	B (mm)
260	205	185
310	230	210
360	275	255
410	300	280
460	335	315
510	360	340
560	405	385

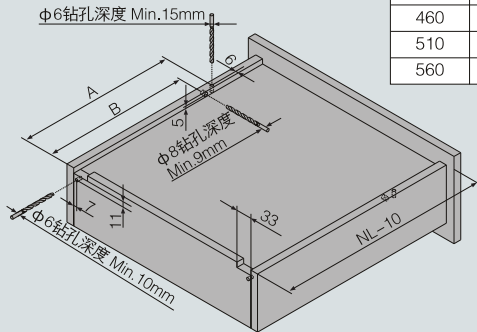


装卸调试步骤说明 Installation instruction

滑轨安装 Installation of the slides

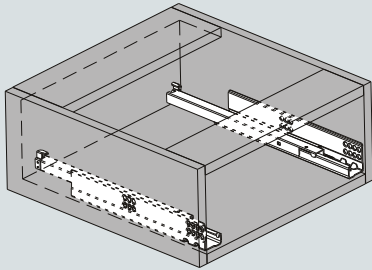

抽屉安装与调节
Installation of the drawer and adjustment

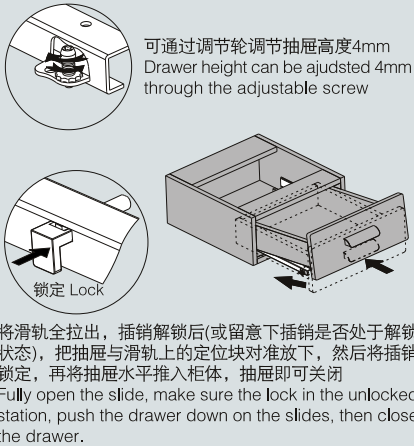

抽屉拆卸 Removal of the drawer

