




- 开启角度: 165度
- 铰杯厚度: 11.3毫米
- 铰杯直径: 35毫米
- 面板(K)尺寸: 3毫米-7毫米
- 材质: 铁镀镍、锌合金杯头
- 门可选用板厚: 14毫米-32毫米
- Opening angle: 165°
- Depth of hinge cup: 11.3mm
- Diameter of hinge cup: 35mm
- Drilling distance on the door(K): 3-7mm
- Material: cold rolled steel, nickel plated, zinc alloy cup
- Range of door thickness: 14-32mm

FE165系列内置阻尼自关铰链功能图 FE165 Installation dimensions



FE165A 全盖 Full overlay

K=5 D=18mm




$\begin{matrix} H & K \\ \backslash & / \\ D \end{matrix}$	3	4	5	6	7
0	16	17	18	19	20
3	13	14	15	16	17
6	10	11	12	13	14



FE165B 半盖 Half overlay

K=5 D=10mm




$\begin{matrix} H & K \\ \backslash & / \\ D \end{matrix}$	3	4	5	6	7
0	8	9	10	11	12
3	5	6	7	8	9
6	2	3	4	5	6




FE165C 内嵌 Insert

K=5 A=1mm



$\begin{matrix} H & K \\ \backslash & / \\ A \end{matrix}$	3	4	5	6	7
0	-3	-2	-1	0	1

铰杯种类 Hinge cup types

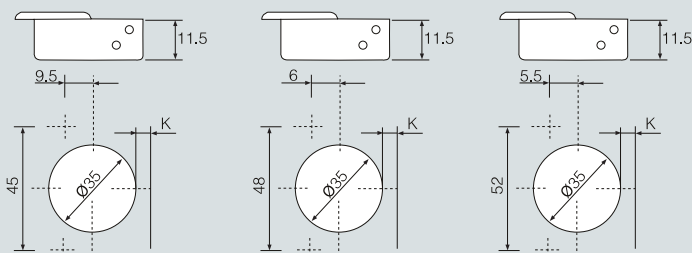

可配底座 Plate

序号 No	名称 Item no.	H值 H Value	孔型/安装尺寸L Hole type/Mounting dimension	类型 type
1	FE1	H=0	两孔two holes/37mm	普通Normal
2	FE2	H=0	四孔four holes/37mm	普通Normal
3	FE3	H=0	四孔four holes/37mm	普通Normal

安装尺寸L(Mounting dimension L)

安装尺寸L(Mounting dimension L)

侧板边沿 Side board edge

侧板边沿 Side board edge

